





Heating Products

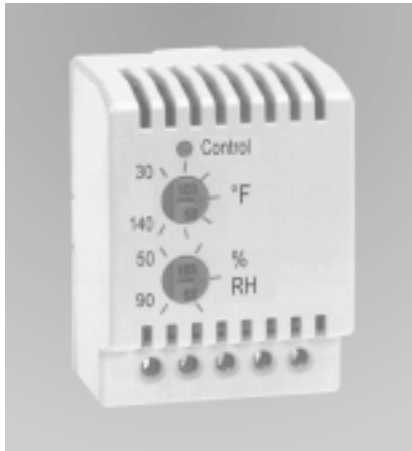


Front View



Side View



Bottom View



Electronic Humidity and Temperature Control

- Designed to provide both air temperature and humidity control as well as monitoring in electrical and electronic enclosures.
- Independently senses the relative humidity and temperature. Resistive and inductive loads (heaters or filter fans) can be switched.
- Highly effective in ATMs, parking control gates, ticket dispensers and traffic control systems where equipment is exposed to wide ranging outdoor elements.

Part No.	Dimensions	Switching Capacity
	Height x Width x Depth	
SKTH012009	2.64 x 1.97 x 1.54	AC 8 A @ 115 V DC 0.5 A @ 100 V DC 8 A @ 12 V DC 5 A @ 35 V

Temperature Range:	32°F to 140°F (0°C to 60°C)
Switching difference (hysteresis):	Approximately 3.6°F (2°K)
Humidity range:	50% to 90% relative humidity
Response time :	Approximately 160 seconds
Function Indication:	LED
Life expectancy:	100,000 cycles
Mounting :	Easily installed by clip mounting on 35mm DIN rail
Housing :	Flame retardant plastic UL94VO
Color:	Gray
Protection:	IP20
Approval:	UL Recognized Component, cUL Recognized Component, CE

All dimensions in inches unless specified otherwise

Quality Enclosures. Service Excellence.

Gross Automation (877) 268-3700 · www.hammondsales.com · sales@grossautomation.com